

Miele

Miele Professional

Laundry & Dishwashing Product Range



Wherever innovative high-end products with an outstanding cleaning performance and high hygiene requirements are needed, Miele Professional is the first choice.



About Miele Professional

Our guiding principle is the highest quality – Immer Besser our common goal.

We are the only manufacturer to test our products for a service life of up to 30,000 cycles. Whether it's analytically pure laboratory glassware or a daily supply of freshly washed laundry for guests,

our guiding principle has driven us for more than 120 years to develop the best solutions for our customers, so that they in turn can offer their customers the best results.

Quality you can rely on

German engineering means that we go into every detail and make every effort to make even the smallest of improvements. The result is a range of the very highest quality commercial laundry and dishwashing machines, with reliability and performance that our competitors are unable to match.

Miele Professional efficiency

Efficient engineering means the greatest value and long term benefits for our customers: long service life, low consumption of water and energy, quick and reliable work processes and dependable, durable technology.

If you consider the costs over the whole service life, you will see how economically you can run a Miele.

Professional performance

Whatever demands are made on a Miele, the powerful performance and durability never fails to impress.

Tested to last over ten years of daily commercial use, our customers can concentrate on their business, confident that our machines will deliver consistent, top quality results every day.



Experience our product range at one of our locations

Visit us to see the quality, efficiency and performance of our machines for yourself. We have Miele Experience Centres in:

Abingdon	London	Harrods	Opening in 2021. Edinburgh
Fairacres Marcham Road Abingdon OX14 1TW	15-19 Cavendish Place Marylebone London W1G 0QE	87-135 Brompton Road Knightsbridge London SW1X 7XL	243 St James Crescent, Edinburgh, Edinburgh City, EH1 3AD



Book a visit to our fully operational test wash centre in the Abingdon and see the quality, efficiency and performance of our machines in person. You'll get hands-on demonstrations and see the results using your own textiles, crockery or glassware.

Quality and reliability

An investment in Miele results in long-term cost savings and peace of mind.

We know that when you are running a business you do not want to have to worry about your washing machine breaking down, or your dishwasher not delivering spotless results - that is why the quality and reliability of our products is so important to us.

At Miele we are renowned for the build quality of our range and we rigorously endurance test all of our products during their development. Our laundry products are tested to run for up to 30,000 cycles and our dishwashers tested for up to 12,000

cycles. Every product we manufacture goes through an end-of-line test too, before passing quality control; we pay attention to the details so that you can concentrate on your business.

We are committed to our products, response times, deliveries and installs being correct first time. All of this means machines that deliver outstanding reliability, long product lifecycles and low running costs. An investment in Miele results in long-term cost savings and peace of mind.



We rigorously
endurance
test all our
products.



Our **dishwashers**
are tested to

12,000
cycles



Our **washing machines**
are tested to

30,000
cycles

That's the
equivalent of 8
cycles a day, 7
days a week for
over 10 years



Simple to use

Whoever is operating your machine, with Miele you will always get the best results, thanks to user interfaces which are set up to be simple to use and to meet your needs completely.

We'll think about the details - wash temperatures, programme times and optimum programme configuration - which means you don't have to. So whether you are washing tablecloths and napkins or heavy soiled crockery, we will make sure that the best programmes are highlighted and staff are fully trained on which programme to choose to deliver the results you need.

When you invest in a new machine we will make sure it is set up so that you can easily access the programmes you will use the most - saving you precious time and ensuring you always get the best results.


Miele

When you buy a new machine we will make sure it is set up so that you can easily access the programmes you will use the most



Miele Professional Service

Choose Miele Professional and choose service that is quite simply, second to none.

You will have access to a wide range of services including pre-sales advice, planning, economic feasibility studies, financing options through to after-sales service.

When you are running a busy laundry room or kitchen we know you cannot afford to have machines that are not working. So if things do go wrong we, or one of our Professional Partners, will be with you either the same day or next working day.

If you are planning a new site we realise not every space is the same, so we offer free design consultancy with site visits to advise you on the products you need and tailored plans to help make the most of the space you have. All of our products are dispatched from the UK, so we can ensure quick delivery of models in stock - getting you the products you need, when you need them.



Product range contents

08-13	14-21	22-27	28-32	34
Washers	Tumble Dryers	Ironers	Dishwashers	Air Purifiers
LITTLE GIANTS 10 PWM 307 Evolution PWM 507 PWM 507 Hygiene PWM 906 PWM 907 PMW 908 PWM 506 Mopstar PWM 508 Mopstar	LITTLE GIANTS 16 PDR 307 HP Evolution PDR 307 PDR 507 HP PDR 507 PDR 908 HP PDR 908	ROTARY 24 HM 16-80 HM 16-83 IRONING TABLES 24 PIB 100 FLATWORK 25 PRI 210 PRI 214 PRI 217	PROFILE 30 PFD 101 PFD 101 U PFD 101 I PFD 103 SCI XXL PFD 104 SCVI XXL PROFESSIONAL 31 PG 8055 - Speed PG 8056 - Speed Plus PG 8058 - Brilliant PG 8059 - Hygiene TANK 32 PTD 701 - BrilliantCompact PTD 702 - UniversalCompact PTD 703 - Universal PG 8172 - Performance PROCARE SHINE 33	AIRCONTROL 34 PAC 1045 PAC 1080 PAC 1200
OCTOPLUS 11 PW 6080 Vario XL PWT 6089 Vario XL PT 7189 XL (Dryer) PW 5105 Vario	9-10 KG 17 PT 7186 Vario XL PT 8203 WP 10-13 KG 17 PT 8253 PT 8257 PT 8257 WP 12-15 KG 17 PT 8301 PT 8303 13-18 KG 18 PDR 518 PDR 918 PDR 918 HP	26 27 M 500 D 500 D 600 D 800		
BENCHMARK 12-20 KG 12 PWM 912 PWM 514 PWM 514 Mopstar PWM 916 PWM 520 PWM 520 Mopstar PWM 920	16-22 KG 18 PDR 522 PDR 922 PDR 922 HP 20-28 KG 19 PDR 528 PDR 928 32-44 KG 19 PDR 544 PDR 944 PROCARE TEX 21			
BENCHMARK 24-32 KG 13 PW 6241 PW 6321				
BARRIER WASHERS 13 PW 6163 PW 6243 PW 6323				



Marine & Offshore

We offer a full range of Marine and offshore models of washers, dryers, ironers and dishwashers. Please contact us for more information if you'd like to know more about these models.

Washers

Miele Professional’s laundry technology guarantees hygienically clean laundry.

Patented Honeycomb Drum

Ensures the gentle care of fabrics combined with first-class cleaning and drying performance.

Award winning Environmental Technology

Miele Professional washing machines are designed with the environment in mind. Low consumption values means valuable water, energy and detergent savings, in fact the new generation of Little Giants require 22% less water and 28% less energy. Adding to their sustainable credentials, 95% of the new Little Giants can be recycled at end of life.

Highest G-Force

A G-Force of up to 704 occurs during extraction in our Little Giants, reducing drying times, energy costs and extending the life of the garment.

WRAS Approved

Our washing machines are compliant with machinery guidelines and certain models, or the parts within, are WRAS approved to Category 5.

Barrier Washers

Miele Professional barrier machines offer optimum physical separation between unclean and clean sides in care homes and hospitals, preventing re-contamination of laundry.

Large range of capacities catering for a wide market



6kg - 32kg drum volumes for washers



Specially designed machines for washing mops and cloths



Barrier machines for care homes and hospitals



Marine and offshore models of washers, dryers, ironers and dishwashers

Control Panels

The variety of Miele interface controls for our products are all designed to be easy to use and ensure maximum efficiency during the cleaning cycle.

LITTLE GIANTS

PWM 307 Evolution
PWM 507
PWM 507 Hygiene
PWM 906
PWM 907
PMW 908
PWM 506 Mopstar
PWM 508 Mopstar

OCTOPLUS

PW 6080 Vario XL
PWT 6089 Vario XL
PT 7189 XL (Dryer)
PW 5105 Vario

BENCHMARK

PWM 912
PWM 514
PWM 514 Mopstar
PWM 916
PWM 520
PWM 520 Mopstar
PWM 920

PW 6241
PW 6321

BARRIER WASHERS

PW 6163
PW 6243
PW 6323



M-Select:

Convenient and approved control, adapted for the future.

Rotary dial for direct selection of washing/drying programmes accompanied by a crystal clear touch display to access additional functions and settings. Direct access to language selection via flag icon. Display can be accessed by user while wearing latex gloves.



M Touch Flex:

Next level comfort and convenience.

Easy to use full colour and touch display. Conveniently select washing/drying programmes and machine functions with a fingertip via the clear text touch display. Programme colour coding for even easier selection of programmes. Swipe function for faster scrolling. Display can be accessed by user while wearing latex gloves.



Profitronic L Vario:

Electronic controls with multi-function selector and user navigation screen. Programme delay and time left display to enable the user to manage their time efficiently. Wide range of standard programmes as well as a number of special programmes such as table linen, pillows and outerwear and reproofing. Additional feature of four short cut keys for most popular programmes on the Plus version.



Profitronic M:

Electronic controls with multi-function selector and user navigation screen. 199 programme slots. Programme selection via rotary selector or 6 short cut buttons. Freely programmable programme parameters. Clear text display with user navigation.



Profitronic D:

Profitronic D controls provide programmes catering for the entire spectrum of laundry care requirements. A text display and 6 direct-access buttons facilitate ease of use and fast programme selection. The most frequently used programmes are assigned to buttons 1–6 and are accessible at the touch of a single button. Further programmes are accessed by pressing and holding button 6. Important parameters such as temperature and spin speed can be selected manually before the start of each programme. Similarly, current load sizes can be entered to reduce water, energy and detergent consumption accordingly.

WASHERS



Little Giants 6-8 KG



Product Code	PWM 307 Evolution	PWM 506 MopStar	PWM 507	PWM 507 Hygiene	PWM 508 MopStar	PWM 906	PWM 907	PWM 908	PW 6080 Vario XL	PWT 6089 Vario XL		PW 5105 Vario
Capacity (kg)	7	6	7	7	8	6	7	8	9	Washer - PWT 6089 XL	Dryer - PT 7189 XL	10
Dimensions: H/W/D (mm)	850/596/714	850/596/714	850/596/714	850/596/714	850/596/714	850/596/714	850/596/714	850/596/714	1020/700/727	1920/692/763	1920/692/763	1020/700/827
Net Weight (kg)	98	99	98	101	101	99	101	103	140	240	180	148
Heating	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Controls	M Select	M Select	M Select	M Select	M Select	M Touch Flex	M Touch Flex	M Touch Flex	Profitronic L Vario	Profitronic L Vario	Profitronic L Vario	Profitronic L Vario
Spin Speed (rpm)	1600	1400	1600	1600	1400	1600	1600	1600	1300	1300	-	1100
G Factor	704	535	704	704	535	704	704	704	520	520	-	370
Residual Moisture (%)	48	52	48	48	52	48	48	48	49	49	-	54
Drainage	Drain Pump	Dump Valve	Drain Pump	Dump Valve	Dump Valve	Drain Pump	Drain Pump or Dump Valve	Drain Pump or Dump Valve	Drain Pump or Dump Valve	Drain Pump	-	Drain Pump or Dump Valve
Electric Requirements: 230V	•	•	•	•	•	•	•	•	•	•	•	•
400V	-	•	-	•	•	•	•	•	•	•	•	•
Other Comments	Energy Rating: A Available in white Stackable	Available in white Stackable Special programs for reprocessing of mops and cloths	Energy Rating: A Available in white or with stainless steel front Stackable	Available in white Stackable	Available in white Stackable Special programs for reprocessing of mops and cloths	Available in white Stackable	Stackable Available in white or with stainless steel front	Stackable Available in white or with stainless steel front	Communication module slot	Communication module slot	Communication module slot	Communication module slot

WASHERS



Benchmark 12-32 KG



16-32 KG Barrier Washers



Product Code	PWM 912	PWM 514	PWM 514 Mopstar	PWM 916	PWM 520	PWM 520 Mopstar	PWM 920	PW 6241	PW 6321	PW 6163	PW 6243	PW 6323
Capacity (kg)	12	14	14	16	20	20	20	24	32	16	24	32
Dimensions: H/W/D (mm)	1350/799/924	1350/799/995	1350/799/995	1450/924/835	1450/924/935	1450/924/935	1450/924/935	1640/1085/1265	1640/1085/1272	1718/1153/1070	1718/1384/1070	1718/1605/1070
Net Weight (kg)	271	276	276	337	389	389	389	640	648	630	820	860
Heating	Electric or steam	Electric	Electric	Electric or steam	Electric	Electric	Electric or steam	Electric, Gas or Steam	Electric, Gas or Steam	Electric, Steam or Dual	Electric, Steam or Dual	Electric, Steam or Dual
Controls	M Touch Pro Plus	M Touch Pro	M Touch Pro Mop	M Touch Pro Plus	M Touch Pro	M Touch Pro Mop	M Touch Pro Plus	Profitronic M	Profitronic M	Profitronic M	Profitronic M	Profitronic M
Spin Speed (rpm)	1150	1025	1025	1075	950	950	1075	1100	1000	1025	975	975
G Factor	460	360	360	460	360	360	460	542	448	400	360	360
Residual Moisture (%)	44	49	>25	44	49	49	44	46	50	48	50	47
Drainage	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve	Dump Valve
Electric Requirements: 230V	-	-	-	-	-	-	-	-	-	-	-	-
400V	•	•	•	•	•	•	•	•	•	•	•	•
Other Comments	Connection of optional accessories via Connector Box	Connection of optional accessories via Connector Box	Connection of optional accessories via Connector Box	Connection of optional accessories via Connector Box	Connection of optional accessories via Connector Box	Connection of optional accessories via Connector Box	Connection of optional accessories via Connector Box	Data shown is for the electric versions	Data shown is for the electric versions			

Tumble Dryers

Miele Professional’s laundry technology guarantees hygienically clean laundry.

Patented Honeycomb Drum

Ensures the gentle care of fabrics combined with first-class cleaning and drying performance.

Residual Moisture Control Dryers

Accurate sensors that measure moisture in the garments to reduce drying times and lower energy costs.

Award winning Environmental Technology

New and innovative Heat Pump dryers and H₂O dryers reduce energy costs by over 50%.

Highest G-Force

The exceptional product quality of Miele washing machines enables spinning with a G-Force of up to 704. This reduces the residual moisture of the garments to a minimum, thereby saving valuable energy in the subsequent drying process.

Large range of capacities catering for a wide market

A capacity range of 7kg to 40kg drum volumes for our dryers meets the needs of businesses large and small.

H₂O Dryers

The H₂O dryer can be put to use wherever water is heated. This can take the form of an on-site cogeneration plant, district heating, bio-mass, or alternative sources of energy where hot water is a by-product.

Control Panels

The variety of Miele interface controls for our products are all designed to be easy to use and ensure maximum efficiency during the cleaning cycle.

LITTLE GIANTS

PDR 307 HP
PDR 307
PDR 507 HP
PDR 507
PDR 908 HP
PDR 908

9-10 KG

PT 7186 Vario XL
PT 8203 WP

10-13 KG

PT 8253
PT 8257
PT 8257 WP

12-15 KG

PT 8301
PT 8303

13-18 KG

PDR 518
PDR 918
PDR 918 HP

16-22 KG

PDR 522
PDR 922
PDR 922 HP

20-28 KG

PDR 528
PDR 928

32-44 KG

PDR 544
PDR 944



M-Select:

Convenient and approved control, adapted for the future.

Rotary dial for direct selection of washing/drying programmes accompanied by a crystal clear touch display to access additional functions and settings. Direct access to language selection via flag icon. Display can be accessed by user while wearing latex gloves.



M Touch Flex:

Next level comfort and convenience.

Easy to use full colour and touch display. Conveniently select washing/drying programmes and machine functions with a fingertip via the clear text touch display. Programme colour coding for even easier selection of programmes. Swipe function for faster scrolling. Display can be accessed by user while wearing latex gloves.



Profitronic B Plus:

Electronic controls with rotary selector. Residual display showing selected drying time/time remaining and residual moisture level. Programme sequence indicators show heat up, cool down, anti-crease. Adjustable programme parameters such as reversing times and residual moisture level.



Profitronic L Vario:

Electronic controls with multi-function selector and user navigation screen. Programme delay and time left display to enable the user to manage their time efficiently. Wide range of standard programmes as well as a number of special programmes such as table linen, pillows and outerwear and reproofing. Additional feature of four short cut keys for most popular programmes on the Plus version.



Profitronic M:

Electronic controls with multi-function selector and user navigation screen. 199 programme slots. Programme selection via rotary selector or 6 short cut buttons. Freely programmable programme parameters. Clear text display with user navigation.

TUMBLE DRYERS



Little Giants 7-8 KG



8-10 KG



10-13 KG



12-15 KG



Product Code

PDR 307 HP
EvolutionPDR 307
Evolution

PDR 507 HP

PDR 507

PDR 908 HP

PDR 908

PT 7186 Vario XL

PT 8203 WP

PDR 514

PDR 914

PDR 914 HP

PT 8301

PT 8303

Capacity (kg)

7

7

7

7

8

8

9

8-10*

10-14

10-14

10-14*

12-15

12-15

Dimensions: H/W/D (mm)

850/596/777

850/596/717

850/596/777

850/596/717

850/605/777

850/605/717

1020/700/763

1800/711/1075

1400/906/852

1400/906/852

1400/906/1232

1800/711/1089

1800/711/1089

Net Weight (kg)

68.5

49

68.5

49

72

52

77

202

160

160

156

139(EL) /145(G)

139(EL) /145(G)

Heating

Electric

Electric

Electric

Electric

Electric

Electric

Electric, Gas

Electric

Electric or Gas

Electric or Gas

Electric

Electric or Gas

Electric or Gas

Controls

M Select

M Select

M Select

M Select

M Touch Flex

M Touch Flex

Profitronic L Vario

Profitronic B Plus

M Select ROP

M Touch Pro

M Touch Pro

Profitronic B

Profitronic B Plus

Electric Requirements: 230V

•

•

•

•

•

•

•

-

• (Gas)

• (Gas)

-

-

-

400V

-

-

-

-

-

•

•

•

• (Electric)

• (Electric)

•

•

•

Other Comments

Energy Rating: A++
Available in white
Stackable
Heat Pump modelEnergy Rating: C
Available in white
Stackable
Vented modelEnergy Rating: A++
Available in white
Stackable
Heat Pump modelEnergy Rating: C
Available in white
Stackable
Vented modelAvailable in white or
stainless steel
Stackable
Heat Pump modelAvailable in white or
stainless steel
Stackable
Vented modelVented model
Available in blue or
stainless steelHeat Pump
integrated

* 1:25 - 1:20kgConnection of optional
accessories via
Connector Box
Iron Grey/Stainless Steel
(EL only)
Vented model
Data shown is for the
electric versionsConnection of optional
accessories via
Connector Box
Iron Grey/Stainless
Steel (EL only)
Vented model
Data shown is for the
electric versionsConnection of optional
accessories via
Connector Box
Iron Grey/Stainless Steel
Heat-Pump unit dimensions
(H/W/D):1370/906/426
* 1:25 - 1:18kgVented model
COP models available

Vented model

TUMBLE DRYERS



13-18 KG



16-22 KG



20-28 KG



32-44 KG



Product Code

PDR 518

PDR 918

PDR 918 HP

PDR 522

PDR 922

PDR 922 HP

PDR 528

PDR 928

PDR 544

PDR 944

Capacity (kg)

13-18

13-18

13-18*

16-22 (13-16 HW)

16-22 (13-16 HW)

16-22

20-28 (16-20 HW)

20-28 (16-20 HW)

32-44 (24-32 HW)

32-44 (24-32 HW)

Dimensions: H/W/D (mm)

1400/906/1035

1400/906/1035

1400/906/1415

1400/906/1164

1400/906/1164

1400/906/1164

1640/1206/1018

1640/1206/1018

1640/1206/1384

1640/1206/1384

Net Weight (kg)

174 (EL), 180 (G)

174 (EL), 180 (G), 208 (S,)

170

199 (EL), 204 (G), 232 (S, HW)

199 (EL), 204 (G), 232 (S, HW)

TBC

243 (EL), 246 (G), 281 (S, HW)

243 (EL), 246 (G), 281 (S, HW)

294 (EL), 295(G), 326 (S,HW)

294 (EL), 295(G), 326 (S,HW)

Heating

Electric, Gas

Electric, Gas Steam

Electric

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Electric

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Electric, Gas, Steam or HW

Controls

M Select ROP

M Touch Pro

M Touch Pro

M Select ROP

M Touch Pro

M Touch Pro

M Select ROP

M Touch Pro

M Select ROP

M Touch Pro

Electric Requirements: 230V

• (Gas, HW)

• (Gas)

-

-

-

-

-

-

-

-

400V

• (Electric)

• (Electric)

•

•

•

•

•

•

•

•

Other Comments

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL only)
Vented with AirRecycling system

Connection of optional accessories via onnector Box
Iron Grey/Stainless Steel (EL, S only)
Vented with AirRecycling (G), AirRecycling Flex (EL), AirRecycling Plus (S) system

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel
Heat-Pump unit dimensions (H/W/D):1370/906/426
* 1:25 - 1:18kg

Connection of optional accessories via Connector Box
Iron Grey
Vented with AirRecycling system
HW (Hot Water) for H20 model

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL,S only)
Vented with AirRecycling (G), AirRecycling Flex (EL), AirRecycling Plus (HW, S) system
HW (Hot Water) for H20 model

Connection of optional accessories via Connector Box
Iron Grey
Heat-Pump unit dimensions (H/W/D):1370/906/426
* 1:25 - 1:18kg

Connection of optional accessories via Connector Box
Iron Grey
Vented with AirRecycling system
HW (Hot Water) for H20 model

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (EL,S only)
Vented with AirRecycling (G), AirRecycling Flex (EL), AirRecycling Plus (HW, S) system
HW (Hot Water) for H20 model

Connection of optional accessories via Connector Box
Iron Grey
Vented with AirRecycling system
HW (Hot Water) for H20 model

Connection of optional accessories via Connector Box
Iron Grey/Stainless Steel (S only)
Vented with AirRecycling (G), AirRecycling Flex (EL), AirRecycling Plus (HW, S) system
HW (Hot Water) for H20 model

LAUNDRY DETERGENTS



ProCare Tex



Product Code	ProCare Tex 11 10kg & 20kg	ProCare Tex 10 5L, 10L & 20L	ProCare Tex 10 MA 5l, 10l & 20l	ProCare Tex 20 OB 5l, 10l & 20l	ProCare Tex 70 S 5l, 10l & 20l
Description	Multi-Purpose Detergent	Sole Detergent	Sole Detergent	Bleaching Agent	Fabric Softener
Type	Powder	Liquid Concentrate	Liquid Concentrate	Liquid Concentrate	Liquid Concentrate
Range in kg of laundry	10kg: 830 20kg: 1660	5l: 780 10l: 15630 20l: 3120	5l: 660 10l: 1320 20l: 2640	5l: 1250 10l: 2500 20l: 5000	5l: 1250 10l: 2500 20l: 5000

ProCare Tex

The complete solution for commercial laundries.

ProCare Tex detergents have been specifically designed by experts to work in harmony with Miele Professional laundry machines. The range offers high-quality and economic detergents that care for a wide range of textiles.

The range is kind to the environment too, being free from phosphates and microplastics. When ProCare Tex is used alongside our high-performance machines, you can be assured that you are receiving the best quality for your commercial laundry.



Commercial Ironers

Smooth, crease-free finish

Optimum laundry finish


Miele rotary ironers are just the machines for a perfect finish on workwear and table linen: simple, fast and economical. In hotels and restaurants, perfectly laundered textiles help keep up appearances. Alongside guaranteeing a perfect finish, rotary ironers are above all simple and safe to use. Roller speed is infinitely selected using a rotary selector. Roller rotation can be stopped at any time by pressing the footswitch. The ARAMID cloth and the aluminium trough ensure efficient results.

The patented automatic finger guard stops the roller in its tracks and retracts the heater plate in the event that anything enters the gap between the roller and the trough. During power failures, the heater plate can be released easily to remove trapped items.

High Performance

Our high-performance flatwork ironers are able to process more than 200 kg of laundry per hour, equating to more than a tonne of laundry per day. These large ironers can be controlled and monitored from their central display, making them safe and easy to use. Contact pressure, temperatures and roller speeds are all selectable and can be saved with password protected user levels. The display also shows cleaning and waxing reminders when due.

Model designations PM 16 and PM 18 are available with electric, gas and steam heating and the touch display shows all the machine parameters at a single glance, allowing the ironer to adapt fast to everyday working conditions.

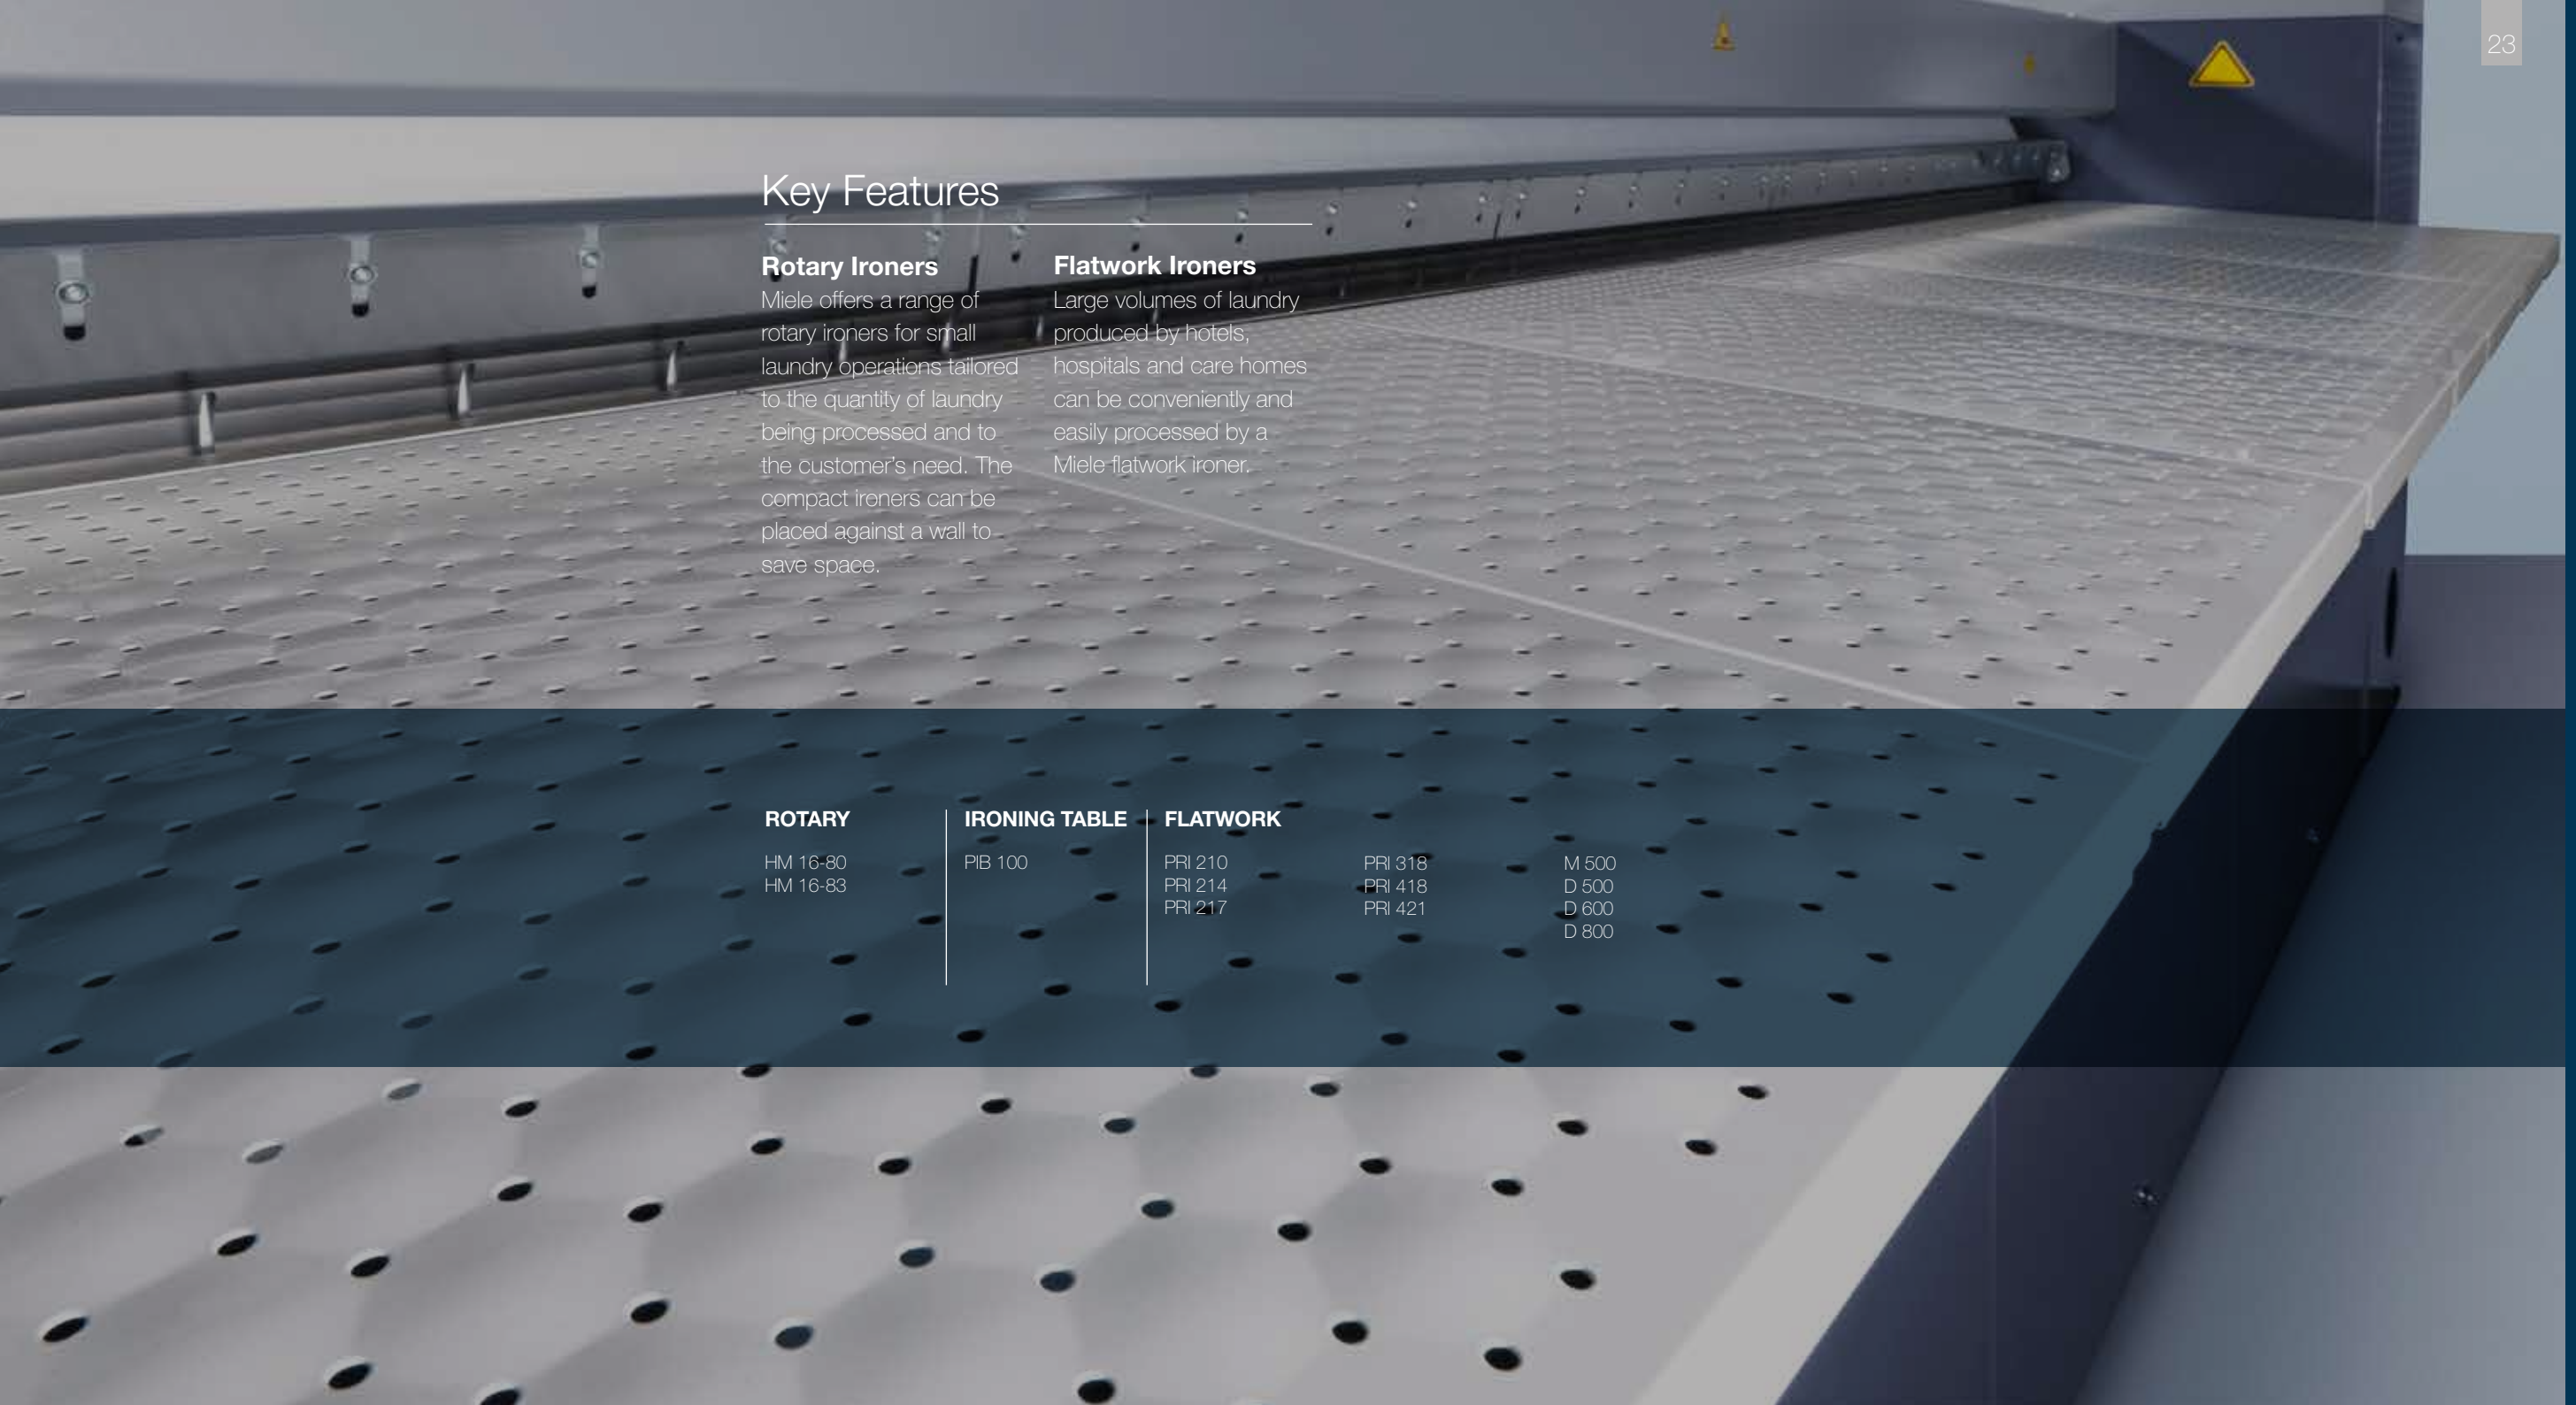

Key Features

Rotary Ironers

Miele offers a range of rotary ironers for small laundry operations tailored to the quantity of laundry being processed and to the customer's need. The compact ironers can be placed against a wall to save space.

Flatwork Ironers

Large volumes of laundry produced by hotels, hospitals and care homes can be conveniently and easily processed by a Miele flatwork ironer.

ROTARY

HM 16-80
HM 16-83

IRONING TABLE

PIB 100

FLATWORK

PRI 210
PRI 214
PRI 217

PRI 318
PRI 418
PRI 421

M 500
D 500
D 600
D 800

IRONERS



Rotary Ironers



Ironing Tables



Flatwork Ironers



Product Code
Roller diameter (mm)
Roller width (mm)
Heater plate
Throughput according to DIN 11902 (kg/h):
Residual moisture 15%
Residual moisture 20%
Residual moisture 25%
Electric Requirements: 230V
400V
External dimensions H/W/D (mm)
Other Comments

HM 16-80	HM 16-83
160	160
830	830
Electric	Electric
13	15
•	•
-	-
959/985/380	960/1050/380
Folding frame Steam Facility Return Feed	Return Feed

Product Code	PIB 100
Active ironing board	Fan which can be reversed to blow or draw air
Large removable water tank	3 hours of ironing without refill
High-quality commercial grade ironing cloth	Heat-proof, colour-fast, high steam permeability, certified according to Öko-Tex-Standard 100
DLC coating on boiler	Descaling cycle 80l = approx. 1 month without descaling
Electric Requirements: 230V	•
Other Comments	Simple set-up and storage with 1-2 lift system

Product Code	PRI 210	PRI 214	PRI 217
Roller diameter (mm)	210	210	250
Roller width (mm)	1000	1400	1660
Heater plate	Electric	Electric	Electric
Throughput according to DIN 11902 (kg/h):			
Residual moisture 15%	30		
Residual moisture 20%			
Residual moisture 25%		33	60
Electric Requirements: 230V	•	-	-
400V	•	•	•
External dimensions H/W/D (mm)	1032/1579/476	1032/1979/650	1110/2238/650
Other Comments	Return Feed	Return Feed	Return Feed and Through Feed

IRONERS



Flatwork Ironers



Product Code
Roller diameter (mm)
Roller width (mm)
Heater plate
Throughput according to DIN 11902 (kg/h):
Residual moisture 15%
Residual moisture 20%
Residual moisture 25%
Electric Requirements: 230V
400V
External dimensions H/W/D (mm)
Other Comments

PRI 318	PRI 418	PRI 421
300	365	365
1750	1750	2040
Electric or Gas	Electric or Gas	Electric or Gas
80 (EL) / 54 (G)	95 (EL) / 70 (G)	101 (EL) / 70 (G)
-	-	-
•	•	•
1110/2469/1377	1110/2469/1441	1110/2759/1441
Through feed (option of return feed module for existing machines) Return feed (new machines, electric model only)	Through feed (option of return feed module for existing machines) Return feed (new machines, electric model only)	Through feed (option of return feed module for existing machines) Return feed (new machines, electric model only)

WASHERS

TUMBLE DRYERS

IRONERS

DISHWASHERS

Product Code	M 500	D 500	D 600	D 800
Roller diameter (mm)	500	500	600	800
Roller width (mm)	1750 / 2000 / 2200 / 2500 / 3000 / 3300	1750 / 2000 / 2200 / 2500 / 3000 / 3300	1750 / 2000 / 2200 / 2500 / 3000 / 3300	1300 / 1750 / 2000 / 2200 / 2500 / 3000 / 3300
Heater plate	Electric, Gas or Steam	Electric, Gas or Steam	Electric, Gas or Steam	Electric, Gas or Steam
Throughput according to DIN 11902 (kg/h):				
Electric & Gas: 50% RM	65-125	65-125	100-175	112-250
Steam: 50% RM	58-112	58-112	90-157	102-225
Electric Requirements: 400V	•	•	•	•
External dimensions H/W/D (mm)	1265 / 2590-4140 / 1130	1200 / 2600-4150 / 1725	1395 / 2830-4380 / 1900	1615 / 2565-4460 / 2115
Other Comments	Through feed	Through feed	Through feed	Through feed



Dishwashers

Miele Professional’s range of commercial dishwashers meet the needs of the most stringent commercial and care environments

Efficient

Extremely short programme cycles capable of completing full freshwater wash cycles in as little as 5 minutes.

Environmentally friendly

Intelligent programmes can be customised to optimise energy and water consumption.

High performance

Miele’s unique freshwater system operates with fresh water in every cleaning cycle achieving high hygienic standards and low energy usage. Hygienic cleanliness is achieved with high rinse temperatures in excess of 80 degrees.

Dependable

All machines are compliant with machinery guidelines and the freshwater dishwashers are WRAS approved for reassurance.

Recommended

Our dishwashers are recommended by Riedel as the perfect machines to wash their delicate glassware.

The perfect partner

ProCare Shine is our very own range of cleaning agents and rinse aids, the perfect partner for your dishwasher.

Key Features

Profiline:

The ProfiLine dishwashers have short cycle times, high cleaning performance and are easy to use, making them perfect for use in offices, showrooms and even private households with large quantities of crockery

Professional:



The **PG 8055 SPEED** and **PG 8056 SPEEDPlus** are the fastest commercial dishwashers using the fresh water circulation system and are ideal for hotels, restaurants, clubs and schools. With its shortest wash cycle of just 5 minutes it can wash up to 456 plates an hour.



The **PG 8058 BRILLIANT** produces perfect wash results with a sparkling finish, dispensing with the need to polish glassware and cutlery if supplied from a RO water system. This feature combined with the fresh water circulation system are unique to Miele Professional.



The **PG 8059 HYGIENE** dishwasher with its uncompromising cleaning system provides exceptionally high standards of hygiene making it ideal for hospitals, nursing homes and nursery schools.

Tank:



Miele Professional Tank system dishwashers have fast cycle times with a maximum theoretical throughput of up to 3234 glasses or 1296 plates per hour, making them perfect for the demands placed on hotels, restaurants, pubs and bars.

PROFILINE

PFD 101
PFD 101 U
PFD 101 i
PFD 103 SCi XXL
PFD 104 SCVi XXL

PROFESSIONAL

PG 8055 - Speed
PG 8056 - Speed Plus

PG 8058 - Brilliant

PG 8059 - Hygiene

TANK

PTD 701 - BrilliantCompact
PTD 702 - UniversalCompact

PTD 703 - Universal
PG 8172 - Performance

DISHWASHERS

ProfiLine Dishwashers



Product Code	PFD 101	PFD 101 U	PFD 101 i	PFD 103 SCi XXL	PFD 104 SCVi XXL	PG 8055	PG 8056	PG 8058	PG 8059
Dimensions: H/W/D (mm)	845/598/570	805/598/570	805/598/570	845/598/570	845/598/570	835/600/600	835/600/600	835/600/600	835/600/600
Net Weight (kg)	60	44	42	52	51	63	63	63	63
Type	Freestanding unit	Built under dishwasher (without laminate lid)	Integrated dishwasher	Integrated dishwasher	Fully integrated	Freestanding unit	Freestanding unit or built under (PG 8056U)	Freestanding unit	Freestanding unit
Dishwashing system	Freshwater system	Freshwater system	Freshwater system	Freshwater system	Freshwater system	Freshwater system	Freshwater system	Freshwater system	Freshwater system
Shortest programme cycle (mins from*)	18	36	18	18	18	9	6 at 55°C	6 at 55°C	6 at 85°C
Plate capacity (plates/h)	13	13	13	14	14	200	380	380	380
Dishwashing programmes	8	8	8	8	8	9	11	11	11
Final rinse temperature	82°C	82°C	82°C	82°C	82°C	70°C	70°C	85°C	85°C
Door lock	Auto Open	Auto Open	Auto Open	Auto Open	Auto Open	Easy Open	Easy Open	Auto Open	Auto Open
Energy Rating	E	E	E	E	E	-	-	-	-

* Supplied without baskets

*Cycle times will vary dependant on water and electrical supplies

DISHWASHERS



Tank Dishwashers



PERFORMANCE



 **BRILLIANTcompact**



 **UNIVERSALcompact**



 **UNIVERSAL**



Product Code	PTD 701	PTD 702	PTD 703	PG 8172
Dimensions: H/W/D (mm)	725(760)/460/617	725(760)/600/617	820(855)/600/617	1515(1995)/635/750
Type	Freestanding/built under	Freestanding/built under	Freestanding/built under	Freestanding/Throughfeed
Dishwashing system	Tank system	Tank system	Tank system	Tank system
Shortest programme cycle (secs)	47	55	55	50
Capacity /hr	1600 glasses or 600 plates	3234 glasses or 882 plates	1188 plates	1296 plates
Baskets/hr	77	66	66	72
Dishwashing programmes	3 + 4 additional programmes	3 + 4 additional programmes	3 + 4 additional programmes	3 + additional programmes

DISHWASHERS
DETERGENT



ProCare Shine



Product Code	ProCare Shine 10MA 5L / 10L	ProCare Shine 11OB 2kg / 6kg	ProCare Shine 12GC 1.28kg	ProCare Shine 12 1.5kg	ProCare Shine 40 1L / 5L / 10L	ProCare Universal 6kg
Description	Mildly Alkaline	Oxygen Bleach	Gentle Care		Rinse Aid	Salt
Type	Liquid Concentrate	Powder	80 Tablets	100 Tablets	Liquid Concentrate	
ProfiLine & Freshwater	•	•	• (for programmes over 10 mins)	• (for programmes over 10 mins)	•	•
Undercounter & Throughfeed Tank					• (5l & 10l only)	•
Days of Use						
ProfiLine (3 cycles/day)	5L : 105 days / 10L : 211 days	2kg : 33 days / 6kg : 100 days	26 days	33 days	1L : 131 days / 5L : 655 days / 10L : 1310 days	
Freshwater (10 cycles/day)	5L : 23 days / 10L : 45 days	2kg : 10 days / 6kg : 30 days	8 days	10 days	1L : 44 days / 5L : 219 days / 10L : 438 days	
Undercounter Tank (40 cycles/day)	5L: 15 days / 10L: 30 days				5L : 173 days 10L : 347 days	
Throughfeed Tank (100 cycles/day)	5L : 5 days / 10L : 10 days				5L : 69 days 10L : 139 days	



Product Code

Dimensions: H/W/D (mm)

Net Weight (kg)

Max. recommended room size*

Air throughput

Air volume tested

(According to EN ISO 11204 at height of
1.55m above floor at a distance of 1m)

5-stage filter system incl. HEPA H14

Minimum air throughput

Max. power consumption (incl. ThermoControl)

Max. power consumption in normal mode**

* With a room height of 2.7m and 6 air changes per
hour (PAC 1200 height 2.5m)

** Setting: 100% fan power, without ThermoControl

AirControl



PAC 1045

1270/500/500

77

45 m²

740 m³/h

25 - 52 dB(A)

•

90 m³/h

1350 W

130 W



PAC 1080

1270/500/500

77

80 m²

1300 m³/h

25 - 63 dB(A)

•

90 m³/h

1350 W

425 W



PAC 1200

1300/700/700

110

200 m²

3000 m³/h

33 - 73 dB(A)

•


150 m³/h

1850 W

1280 W

appWash


appWash, an innovative service from Miele Operations & Payment Solutions GmbH, connects your entire laundry room with a digital all-in-one platform. In an apartment block, student residence or elsewhere; appWash ensures optimal operation for your laundry room. This means less work and maximum transparency for you.



appWash pay

Do you already have an existing laundry room in your apartment block or student residence or would you like to set up a new one? No problem: we can easily equip existing or new machines with our appWash-Pay-System.

1. We set up your online portal linking your washing machines and dryers via the appWash app
2. Customers can immediately use your service on a mobile and cashless basis via service providers, such as PayPal
3. We send you a statement for your business at the end of each month



appWash relax

With appWash Relax, you can be sure to concentrate purely on your core business: appWash takes over full responsibility for your laundry room and manages its operation.

1. We install our own commercial machines including the appWash system
2. appWash takes over customary market pricing and direct billing with the users.
3. We are the central point of contact and act as a representative for all processes in your laundry room.



Miele History & Innovation

Innovation has been at the heart of Miele's success for over 120 years

From the first fully automatic washing machine to the latest energy and water saving technology, we lead the way. When you buy a Miele machine you benefit from innovative, intelligent solutions that deliver reliable results.

Our drive to innovate is independently recognized too - we've won awards for everything from design through to the way we apply technology. When we design a new machine we think about how we can make it better - the details we can change to improve performance, increase efficiency and deliver the best results.

Innovation doesn't end with our products either - we're always looking at ways to improve the service we give to our customers, listening to you and being responsive to ensure that we're delivering the products and services you need.



High quality means low environmental impact

Sustainable, cost effective performance

Because you don't want to worry about the impact of rising energy prices, we have developed all of our products to lead the market for energy and water efficiency. At the heart of all our product design is sustainable, cost-effective performance that achieves optimum results.

Our machines last longer too, so you will replace them less often, minimising environmental impact and disposal costs. When a product does come to the end of its life, most of it is easily recyclable - so from start to finish we are ensuring maximum sustainability.

Our machines offer many characteristics which significantly contribute to sustainability: low consumption (of energy, water and chemical substances), a high proportion of recyclable materials and secondary raw materials and environmentally friendly procedures.

In addition, all European company locations are certified to ISO 9001, ISO14001, OHSAS 18001 and SA 8000 standards.

57%

lower CO₂ emissions
since 2000

2,860,000

kWh energy saving per year at
our new office in Gütersloh

2004

Miele has been a member
of the UN Global Compact,
an initiative promoting
sustainability in businesses,
since 2004

Our machines last longer, so you will replace them less often, minimising environmental impact and disposal costs.

Sustainable thinking since 1899



Miele Quality Pledges

Miele's global reputation for reliability is no accident.

All our products undergo meticulous testing to simulate over ten years of continuous and rigorous use.



Our **washing machines** are tested to

30,000 cycles

that's the equivalent of 8 cycles a day, 7 days a week for over 10 years



The on/off switch on our **washing machines** and **tumble dryers** is tested to operate

100,000 times



Our **tumble dryers** are tested to

40,000 cycles



All our **ironers** are tested to operate for up to

20,000 hours



The fluff flap on our **tumble dryers** is opened and closed

10,000 times



The doors on our **dishwashers** are opened and closed

100,000 times



The doors on our **washing machines** are opened, closed, locked and unlocked

60,000 times



The detergent dispenser flap on our **washing machines** is opened and closed

30,000 times



Our **dishwashers** are tested to

12,000 cycles



All our **tumble dryers'** central bearing and support rollers operate for more than

20,000 hours

Miele

Miele GB
Fairacres, Marcham Road, Abingdon, OX14 1TW

☎ 0330 8387428 ✉ professional.info@miele.co.uk

🌐 www.miele.co.uk/professional 🐦 @MieleProf 🌐 [mieleprofessional](https://www.linkedin.com/company/mieleprofessional)